




REFRIGERATION

PARAGON®

DEFROST MODULES

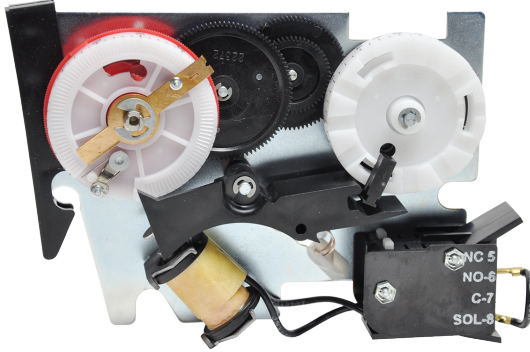

RM Series

RM Series

The Paragon® RM Series includes program and motor modules. Defrost initiation is adjustable from 1-12 operations per circuit, per day; minimum 2 hours required between successive operations. Mechanical defrost termination is adjustable from 6-106 minutes in one-minute increments. Solenoid termination is optional. Instantaneous transfer if solenoid is energized at time of defrost initiation. Two SPDT snap switches per module. 3/16" male push-on switch terminals. Switch rating: 10 Amps, 1/3 HP, 120-240V AC; 345 VA pilot duty.

Features and Benefits

- Extra trippers, part number X-7248 (12 per bag)
- UL Listed and CSA Approved

Specifications

Part Numbers	Description	Circuit	Hour	High Pressure (Open High) Cut-Out	Comments	Electrical Rating
A877-20	RM Series Program Module	Circuit Module	Even Hour	1 (0.5)	With solenoid	208-240V AC, 60 Hz
A878-20	RM Series Motor Module	NA	Drive Module	1 (0.5)	NA	208-240V AC, 60 Hz



1 Year
Limited
Warranty

